


LadonX™ Category 6A


S/FTP 26AWG FR-LSOH Jacket Data Cable

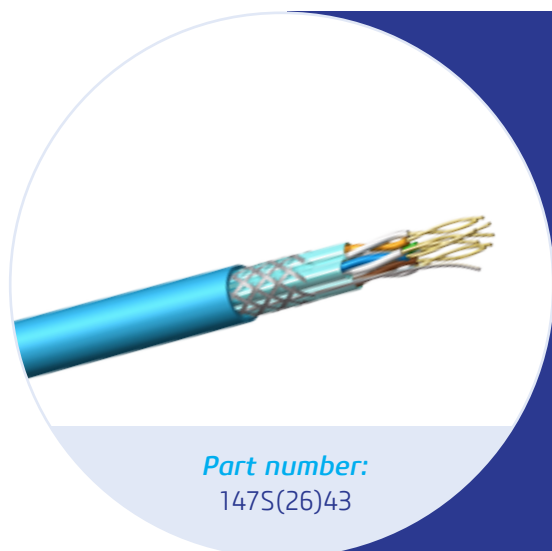

LadonX™ series Cat. 6A S/FTP FR-LSOH data cable is well suited for 10 Gigabit Ethernet Cabling System and installation in fire safety environments. Bandwidth frequency up to 500Mhz.

Superior design of overall tinned copper braiding and individual pair shielding provide excellent electromagnetic/radio frequency interference (EMI/RFI) protection and alien crosstalk suppression.

The Hermesys shielded structured cabling system comprises of shielded modular connectors, patch panels, patch cords and cables. The system is ideal for deployment in all mission-critical network systems where EMI/RFI might be of a concern.

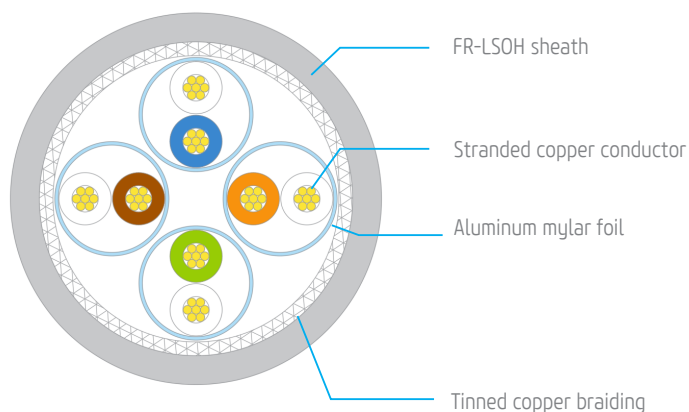

Cross section of part number:
< Not to scale >

Features and Benefits

Each single pair individually shielded with Aluminum foil and overall with tinned copper braiding.

Available for Power Over Ethernet (POE), POE +

Data cable for structured premises cabling, Digital/Analogue Voice, video and data signals.

RoHS Compliant.

Standards

Comply

ANSI/TIA 568-C.2
ISO/IEC 11801
IEC 61156-5
EN50173-1

Flame Resistance

IEC 60332-1-2
IEC 60754-2
IEC 61034-1 & -2

LadonX™ Category 6A

S/FTP 26AWG FR-LSOH Jacket Data Cable

Cable Description

CONDUCTOR & INSULATION

Conductor Material	Annealed Bare Copper
Conductor Size	26 AWG (7/0.16mm)
Insulation Material	Foam PE
Insulation Min Thickness	0.34 mm
Insulation Diameter	1.00 ± 0.05mm
Cross Filler	N/A

PAIRS

Pair 1	Blue / White - Blue
Pair 2	Orange / White - Orange
Pair 3	Green / White - Green
Pair 4	Brown / White - Brown

SHIELDED & JACKET

Drain Wire	N/A
Single Pair Shielding	Aluminum Mylar Foil
Overall Shielding 1	Tinned Copper Braiding 40% coverage
Overall Shielding 2	N/A
Jacket Type	FR-LSOH
Cable Overall Diameter	6.10 ± 0.4 mm

PHYSICAL TECHNICAL DATA

Cold Bend Test	-20 ± 2°C * 4hrs no. crack
Jacket Min Tension Strength (psi) Before Aging	1450
Jacket Min Elongation (%) Before Aging	125
Jacket Min Tension Strength (psi) After Aging	1160
Jacket Min Elongation (%) After Aging	100
Min. Bending Radius (mm)	≥ 8 * cable diameter
Max Pulling Tension (N)	≤ 100N
Installation Temperature	- 25°C to 60°C
Operating Temperat	- 30°C to 70°C

LadonX™ Category 6A

S/FTP 26AWG LSOH Jacket Data Cable

ELECTRICAL TECHNICAL DATA

Conductor Resistance (ohm/100m @ 20 c)	Max. 14.8
DC Resistance Unbalance (%)	Max. 5.0
Pair-to-ground Capacitance Unbalance (pF/100m)	Max. 1.2
Velocity of Propagation (%)	80%
Input Impedance (ohm)	100 ± 15Ω (1MHz - 250MHz)
	100 ± 22Ω (251MHz - 500MHz)

IEC 61156-5 ed 2.0 Category 6a Horizontal Cable Parameters

AT 20°C

Freq. (MHz)	Ins. Loss (dB/100m)	RL (dB) Min	NEXT (dB/100m)	ELFEXT (dB/100m)	PS-NEXT (dB/100m)	PS-ELFEXT (dB/100m) Min	Delay Skew	Po. Delay (ns/100) Min
1	2.1	20.0	74.3	67.8	72.3	64.8	45	570.0
4	3.8	23.0	65.3	55.8	63.3	52.8	45	552.0
8	5.3	24.5	60.8	49.7	58.8	46.7	45	546.7
10	5.9	25.0	59.3	47.8	57.3	44.8	45	545.4
16	7.5	25.0	56.2	43.7	54.2	40.7	45	543.0
20	8.4	25.0	54.8	41.8	52.8	38.8	45	542.1
25	9.4	24.3	53.3	39.8	51.3	36.8	45	541.2
31.25	10.5	23.6	51.9	37.9	49.9	34.9	45	540.4
62.5	15.0	21.5	47.4	31.9	45.4	28.9	45	538.6
100	19.1	20.1	44.3	27.8	42.3	24.8	45	537.6
200	27.6	18.0	39.8	21.8	37.8	18.8	45	536.5
250	31.1	17.3	38.3	19.8	36.3	16.8	45	536.3
300	34.3	16.8	37.1	18.3	35.1	15.3	45	536.1
500	45.3	15.2	33.8	13.8	31.8	10.8	45	535.6

Ordering information

Part Number	147S(26)43
Sheath Marking	Hermesys LadonX Cat. 6A S/FTP 26AWG FR-LSOH Data Cable147S(26)43 IEC 60332-1 ANSI/TIA 568-C.2 ISO/IEC 11801 xxxxM MMY

Shipping information

147S(26)43-500D	500m/wooden drum
-----------------	------------------