


HydraX™ Fixed Type FO Patch Panel

2U 12 slots 288F High Density Splicing Patch Panel

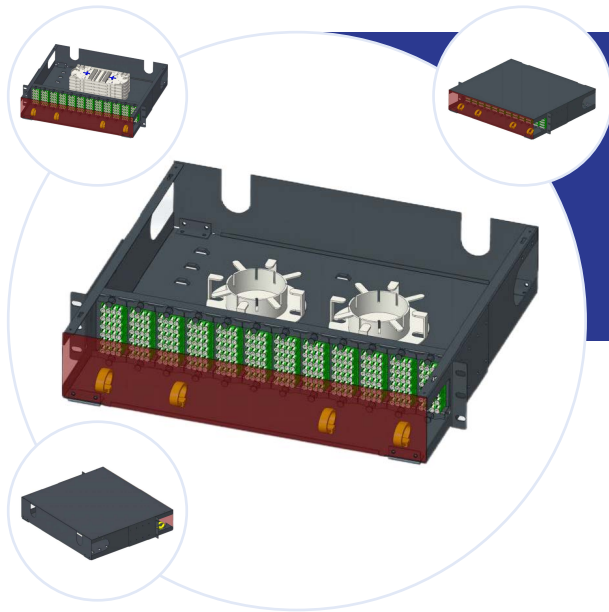

HydraX™ High Density FO patch panel provide excellent access to the cable's individual fibres for cross connection. It is convenient equipment to organize and connect the fibre optic links.

HydraX™ high density FO patch panels are commonly used in computer networking, recording studios, radio and television.

Features and Benefits

Suitable for on site high density terminated solution. Provide proper cable routing and protection.

The high density panel can load 12 sets 24core LC Quad faceplate. Up to 288 core in 2U.

Top cover removable for easier operation inside the panel. 4 U-shape hole at both side to let the cable in&out easily for management

Support SC Duplex/LC Quad and MPO/MTP adaptor

Applications and Standards

The panel can manage, house and protect cassettes, FO cable, terminations, connectors and patch cords.


IEC 60297-3-2010 Dimensions of mechanical structures of 19" series.

IEC 24764-2010 General cabling system for data centres.

TIA-942-2-2010 Telecommunications Infrastructures Standard.

Characteristics & Properties

Panel Material	SPCC
Number of Slots	12 slots
Faceplate Material	SPCC
Color of Panel	Black RAL 9005
Cassette Type	Splicing or Direct connect

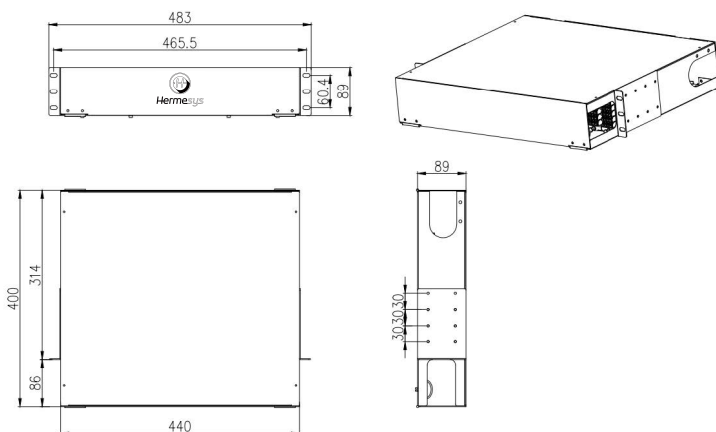

HydraX™ Fixed Type FO Patch Panel

2U 12 slots 288F High Density Splicing Patch Panel

PRODUCT CODE	DESCRIPTION	COLOR
PP-F352012100	2U rack mount high density 288F fixed type unloaded patch panel	Black
FP-FP10121QS	24 core LC Quad Singlemode face plate with SM adaptor	Black
FP-FP10121QM4	24 core LC Quad Multimode face plate with OM4 adaptor	Black