

HydraX™ Premium FO Patch Panel

2U 12 slots 288F High Density Splicing Patch Panel



HydraX™ High Density FO patch panel provide excellent access to the cable's individual fibres for cross connection. It is convenient equipment to organize and connect the fibre optic links.

HydraX™ high density FO patch panels are commonly used in computer networking, recording studios, radio and television.

Features and Benefits

Suitable for on site high density terminated solution. Provide proper cable routing and protection.

The high density panel can load 12 sets 24core LC cassette. Up to 288 core in 2U.

The each layer can be pulled out separately

Support SC Duplex/LC Quad and MPO/MTP adaptor

Applications and Standards

The panel can manage, house and protect cassettes, FO cable, terminations, connectors and patch cords.


IEC 60297-3-2010 Dimensions of mechanical structures of 19" series.

IEC 24764-2010 General cabling system for data centres.

TIA-942-2-2010 Telecommunications Infrastructures Standard.

Characteristics & Properties

Panel Material	SPCC
Number of Slots	12 slots
Cassette Material	High Quality PC+ABS
Color of Panel	Black RAL 9005
Cassette Type	Splicing or Direct connect

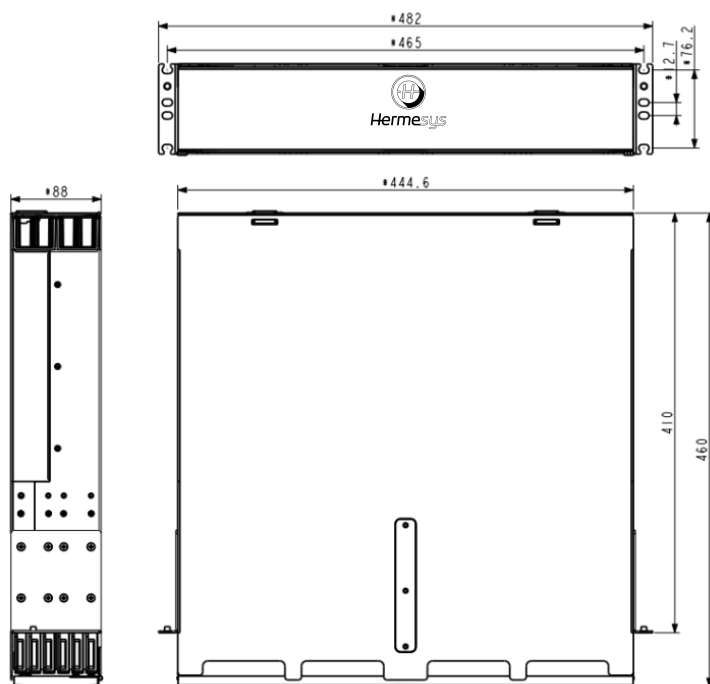

HydraX™ Premium FO Patch Panel

2U 12 slots High Density Splicing Patch Panel

PRODUCT CODE	DESCRIPTION	COLOR
PP-F382012200	2U rack mount premium 288F splicing cassettes unloaded patch panel	Black
CA-3S0NN24	24F LC Quad Singlemode splicing cassette	Transparent
CA-3M0NN24	24F LC Quad Multimode splicing cassette	Transparent