


HydraX™ Fibre Optic Closure

GJS41-09 Fibre Optic Splice Closure

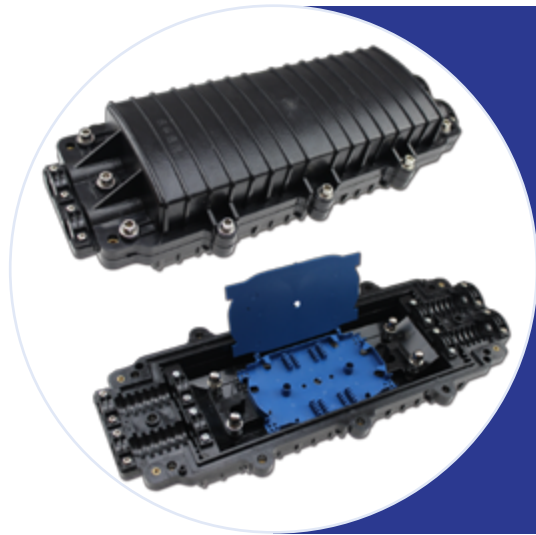

HydraX™ HM-GJS41-09 fiber optic splice closure is able to hold up to 144 splicing points. The fully rugged design enable it to work in the harshest environment, the mechanical locking system maintains the protection level at IP68 grade. It is suitable for direct buried pipeline, wall mounted, manhole and handhole installation. 4 cable entrances (5-23mm) supports 2 cables entry from left and 2 cables entry from right side.

Features and Benefits

Water-proof design with IP-68 Protection level.
 Half design with easy access and tight water proof.
 Impact test: IK10, Pull Force: 100N ,Full rugged design.
 All stainless metal plate and anti-rusting bolts, nuts.
 Maximum splice capacity: 144fiber(6trays×24F).
 Suitable for the fusion splice or mechanical splice.
 Mechanical sealing with rubber protection tube.

Applications

Direct buried installation.
 Pole mounted installation.
 Wall mounted installation.
 Man hole and hand hole installation.
 FTTH access layer.

Configuration

Material	Polycarbonate (strengthen PC)
Field Size	465 * 195 * 125mm
Max Capacity	Splice Cores : 144 Fibres Trays : 6 * 24F/tray
Cable Entrance	4 ports * 23mm, 2 in 2 out
Sealing Method	Mechanical sealing w/thermoplastic rubber.
Temperature	-40°C ~ 65°C
Weight	2.3 kgs

Accessories

Standard	Installation bolts and nuts, Protection sleeves, Cable entry grommet, Cable tube, allen key.
Optional	Bracket for wall, mounted, pressure valve, pole mounted kits.